




StudioProjects

LSM

Little Square Mic

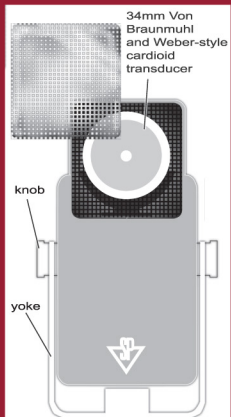


Practical Utility and Stylish Simplicity


Large capsule, dual output microphone

The LSM, by Studio Projects, is a large capsule condenser microphone with two outputs - USB and XLR. It features a compact, thin profile with an integrated, folding yoke that permits the mic to sit on a flat surface freely, or mount onto a mic stand. By virtue of its capsule, electronics and robust build quality, the LSM is geared towards professional recording, but its clever design allows seamless integration into your DDE (Digital Desktop Ensemble) whether for Skype, iChat, podcasting, or videoconferencing. Equally at home in the studio, or concert hall, the LSM is portable and easy to set up. The XLR output with supplied cable, is a standard +48v solid state, Class A discrete signal path, while the USB output allows direct connection to Windows or Mac-based systems with ease. Choose from four different colors to best suit your tastes and enjoy the sonic flavor of an LSM today!

Element: 34mm Pressure Gradient Transducer
Polar Pattern: Uni-directional
Frequency Response: 20Hz-20kHz
Sensitivity: -32dB±2dB (0dB=1V/Pa at 1kHz)
Output Impedance: 150Ω±30% (at 1kHz)
Load impedance: ≥1000Ω
Self Noise: 16dB A
Max. Input SPL: 132dB (at 1kHz ≤1% T.H.D.)
S/N Ratio: 78dB
Phantom Power Requirement: 48V DC Phantom
Electrical Current: 3mA

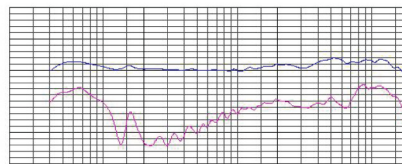

Sensitivity = 25mV/PA -30.52601 dBV @ 1 Pa
Impedance = 1.993591E-03 ohms

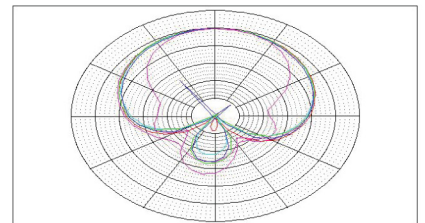

The LSM sits up on its own, no stand necessary. The LSM also mounts on a mic stand.



Designed in the USA by Brent Casey

StudioProjects



The LSM joins the Studio Projects line of high quality recording gear.

www.studioprojects.com

B Series



B1

B3

TB1

C Series



C1

C3

C4

T3

LSD2

CS Series



CS1

CS5

Preamps



sp828



VTB-1

PMI Audio Group

PMI Audio US: 845 W. 169th St. Gardena, CA 90247 310-323-9050

PMI Audio UK: 4 Minerva Court Woodland Court Torquay, Devon TQ2 7BD +44(0)1803 612 700